


JCB Teletruk variable reach forklifts

Lift capacities of 6,000 and 7,000 lbs @ 24" load centre

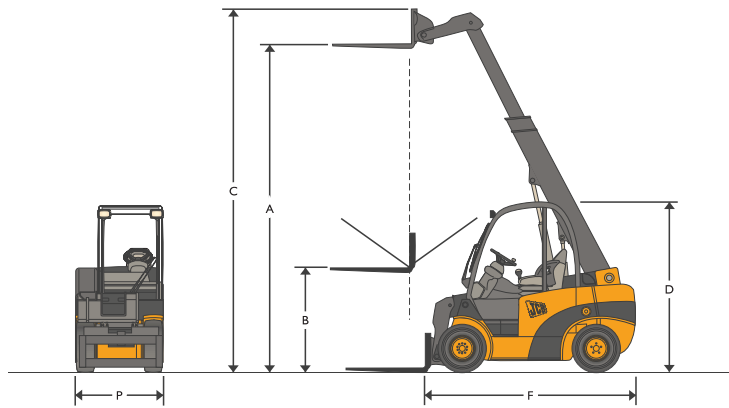


Model	Ref	TLT30D/G	TLT30D 4x4	TLT30DHL	TLT35D	TLT35D 4x4
Lift capacity @ 24 in load centre		6 000 lbs	6 000 lbs	6 000 lbs	7 000 lbs	7 000 lbs
Lift capacity @ maximum forward reach		2 750 lbs	2 750 lbs	2 250 lbs	3 250 lbs	3 250 lbs
Maximum reach with boom horizontal		94 in	94 in	130 in	95.6 in	96.4 in
Lift height	A	13 ft	13 ft	16 ft 10 in	14 ft	14 ft
Free lift (standard)	B	55.5 in	61.4 in	48 in	47.6 in	53 in
Height boom extended	C	15 ft 2 in	15 ft 4 in	18 ft 8 in	16 ft 3 in	16 ft 5 in
Height of overhead guard (std/low)	D	88.5/83 in	90.5/86.6 in	88.5/83	88.5/83 in	90.5/86.6 in
Length to fork face	F	108 in	111.8 in	133 in	118 in	126 in
Maximum width	P	50 in	55 in	50 in	50 in	55 in
Underclearance		6.0 in	6.5 in	6.0 in	6.0 in	7.0 in
Turning radius		98 in	118 in	114 in	114 in	138 in
Aisle width 90° stacking		165 in	185 in	184 in	184 in	207 in
Engine type		Diesel/LPG	Diesel	Diesel	Diesel	Diesel
Engine model		Perkins/GM	Perkins	Deutz	Deutz	Deutz
Gross engine output		50 hp	50 hp	60 hp	60 hp	60 hp
Rated rpm		2 600	2 600	2 600	2 600	2 600
Weight unladen		10 802 lbs	11 243 lbs	11 860 lbs	11 243 lbs	12 125 lbs

Because of our constant dedication to product improvement, all specifications are subject to change without notice.

— All JCB Teletruk meets or exceeds all ANSI B56.1 safety standards. —

Lift capacity @ at other side of truck/trailer

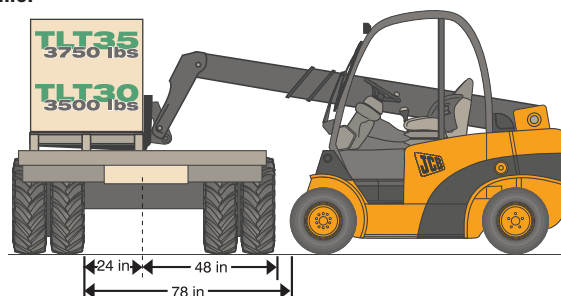

Sellick Equipment Limited

P.O. Box 1000/358 Erie Street North • Harrow, Ontario, Canada • N0R 1G0
519-738-2255 • sellick@mnsi.net

Standard features

The versatile Teletruk with **extended forward reach** capability allows **quick** and convenient unloading or loading of flatbed trucks from one side. The 111° carriage tilt coupled with quick disconnects allows easy changing of attachments. These machines are ideal for work in close quarters—indoor or outdoor—with their small dimensions and tight turning radius.

Maximum lift capacity

TLT30 Series: 6 000 lbs

TLT35 Series: 7 000 lbs

Engine

TLT30D/G & TLT30D 4x4:

Perkins 404D-22, Tier III 50 hp diesel engine.

Optional GM 3.0 L 4-cylinder 63 hp LPG engine.

TLT30DHL & TLT35 Series:

Deutz 2011 3.6L Tier III 62 hp diesel engine.

Transmission

Hydrostatic transmission with torque converter response.

Operator's Enclosure

Comfortable and ergonomically-designed operator's enclosure meets North American safety standards for roll-over protection (ROPS) and falling object protection (FOPS).

Boom

"Slimline" boom allows maximum visibility of the forks. Wear pad design eliminates chain and roller maintenance of masted machines.

Standard equipment

- Fully adjustable suspension seat with retractable seatbelt
- Flow divider "diff-lock" for traction control on 2WD units
- Lighting kit includes two headlights, rotating beacon and one rear light
- Hose burst check valves on tilt, lift and extension cylinder circuits
- Full-time all-wheel drive on 4WD units
- Back up alarm



versatile

valuable

Work productively

Increase your productivity with this variable reach forklift. Save time by quickly loading and unloading flatbed trucks from one side. Increase inventory storage by reducing truck loading areas.

The Teletruk can be more than a forklift. Easily change from carriage and forks to bucket or any attachment, using the quick disconnect system.

The Teletruk, available in 2WD or full-time 4WD, offers outstanding adverse conditions performance.

JCB Teletruk variable reach materials handler