


Poultry coop handlers

Lift capacities @ 48" load centre

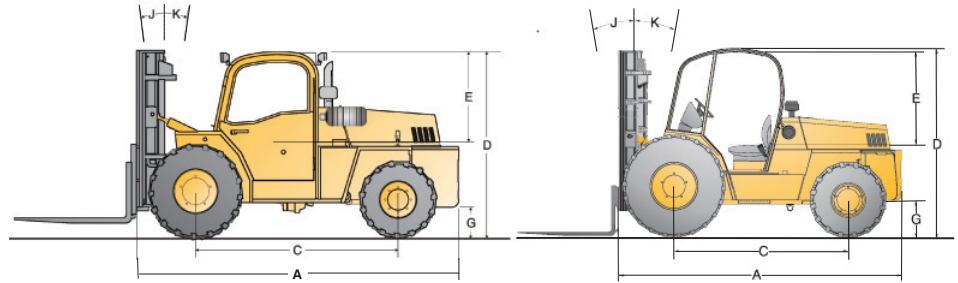


Optional equipment & attachments

Powershift automatic transmission

20/20 or 20/40 rotator carriages for pullet or broiler handling

Wide variety of forks

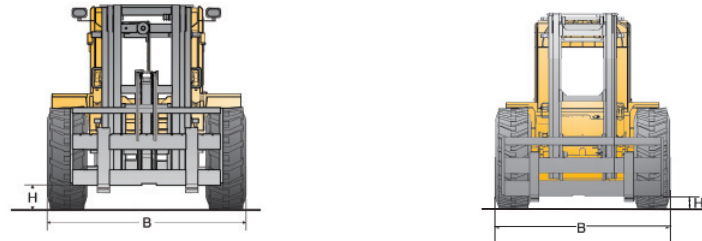

Model	Ref	SLP-60	S60
Lift capacities @ 48 inch load centre		3 200 lbs/1,451 kg	3 200 lbs/1,451 kg
Overall length (without forks)	A	141"/3 581 mm	149"/3 785 mm
Overall width	B	78"/1 981 mm	89"/2 261 mm
Wheelbase	C	87"/2 210 mm	89"/2 261 mm
Height to top of overhead guard (poultry)	D	79"/2 007 mm	85"/2 159 mm
Distance from seat to overhead guard (poultry)	E	40"/1 016 mm	40"/1 016 mm
Outside turning radius		2WD: 172"/4 369 mm 4WD: 190"/4 826 mm	178"/4 521 mm
Aisle width 90° stacking		2WD: 260"/6 604 mm 4WD: 278"/7 061 mm	266"/6 756 mm
Frame underclearance	G	11"/279 mm	15"/381 mm
Mast underclearance	H	12"/203 mm	12"/305 mm
Mast sideshift		6"/152 mm	6"/152 mm
Mast tilt - forward	J	20°	45°
Mast tilt - rearward	K	10°	12°
Gradeability		25%	25%
Tire size type & size (standard)	Drive (pneumatic)	15 - 19.5 - 12 ply	15.5 x 25 - 12 ply
	Steer (pneumatic)	12 - 16.5 - 10 ply	14 x 17.5 - 14 ply
Engine manufacturer & model		Tier 3 Dieselmax 444 diesel turbocharged	
Cylinders		4	
Engine output (gross power)		84 hp @ 2 200 rpm	
Peak torque		267 ft-lbs @ 1 200 rpm	
Transmission type (optional)		4-speed fully automatic powershift	

Because of our constant dedication to product improvement, all specifications are subject to change without notice.

— All Sellick forklifts meet or exceed all ANSI B56.6 safety standards. —



Sellick Equipment Limited • P.O. Box 1000/358 Erie Street North • Harrow, Ontario, Canada • N0R 1G0 • 519-738-2255 •



Poultry coop handlers

Powerful

Work in tight quarters

The low profile SLP and S Series are specially equipped to handle the demands of the poultry industry. Poultry Coop Handlers have full lift capacity to maximum fork height to ensure operator safety, productivity and efficiency in the tightest quarters.

Exceptional performance is delivered from a high powered diesel engine coupled to a fully automatic transmission which increases productivity and reduces downtime.

All models are available in two- or four-wheel drive for excellent on-command traction.



S SELICK